

E-35 S/D DUE

Single lever cartridge
Standard 35mm


08E35FAZ30




Technical specifications

Nut torque/Pitch M1,5	10-12 N.m
Opening angle	25°
Rotation angle	90°
Working pressure (recommended)	1 - 5 bar
Burst pressure	28 ÷ 35 bar
Life cycle	EN 817 ASME 112.18.1 M
	70,000 cycles 500,000 cycles
Sensitivity	8,9° ÷ 9,2° angle
Fidelity	4,1 °C
Constant 63°C & 50°C (6 l/min-3 l/min)	< 4°C - < 6°C
Max. Hot water	90 °C
Max. Hot water recommended	60 - 65 °C
Flow rate at 3 bar	
Free flow	22,60 l/min
C-Restrictor	18 l/min
Operation torque	
Open - close	0,19 ÷ 0,25 Nm
Turn left-right	0,22 ÷ 0,33 Nm

Flow

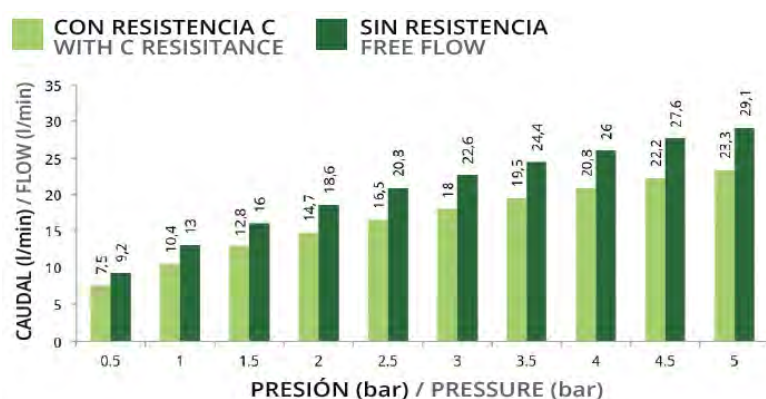

Sensitivity

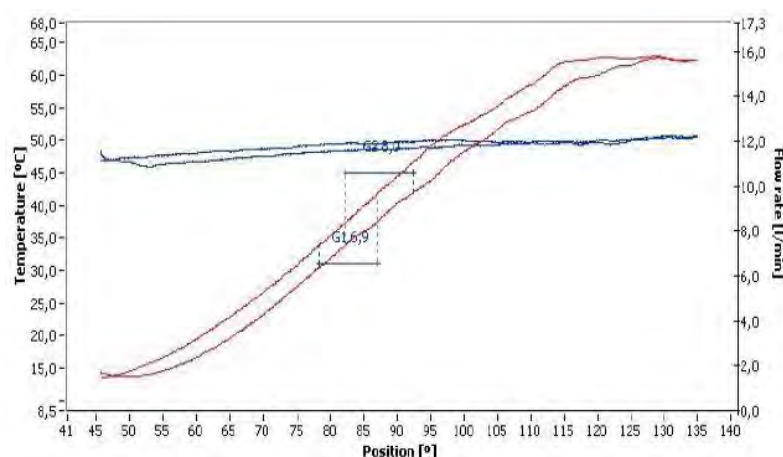

E-35 S/D DUE

Machining prescription

