

EN-40 C/D

Single lever cartridge
Standard 40mm


08EN40LAZ00




Technical specifications

Nut torque/Pitch M1,5	10 - 12 N.m	
Opening angle	25°	
Rotation angle	100°	
Working pressure (recommended)	1 - 5 bar	
Burst pressure	55 ÷ 65 bar	
Life cycle	EN-817 ASME 112.18.1 M	70,000 cycles 500,000 cycles
Sensitivity	15° ÷ 17° angle	
Constant 63°C & 50°C (6 l/min-3 l/min)	0,5 °C - 1,7 °C	
Max. Hot water	90 °C	
Flow rate at 3 bar		
Free flow	26 l/min	
C-Restrictor	21,60 l/min	
Operation torque		
Open - close	0,25 ÷ 0,35 Nm	
Turn left-right	0,25 ÷ 0,35 Nm	

Flow

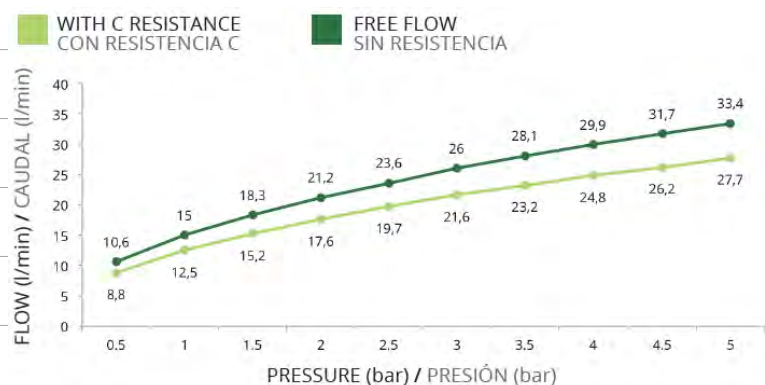

Sensitivity

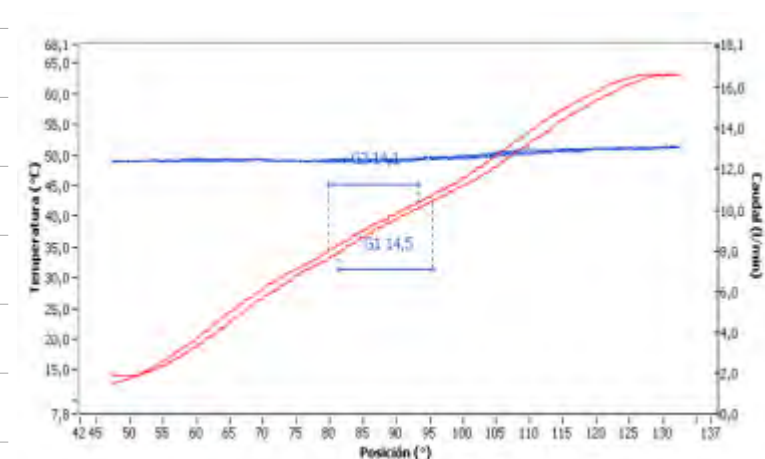


⁽¹⁾ Measured with Sedal's faucet


Single lever cartridge standard 40mm

EN-40 C/D

Technical dimensions

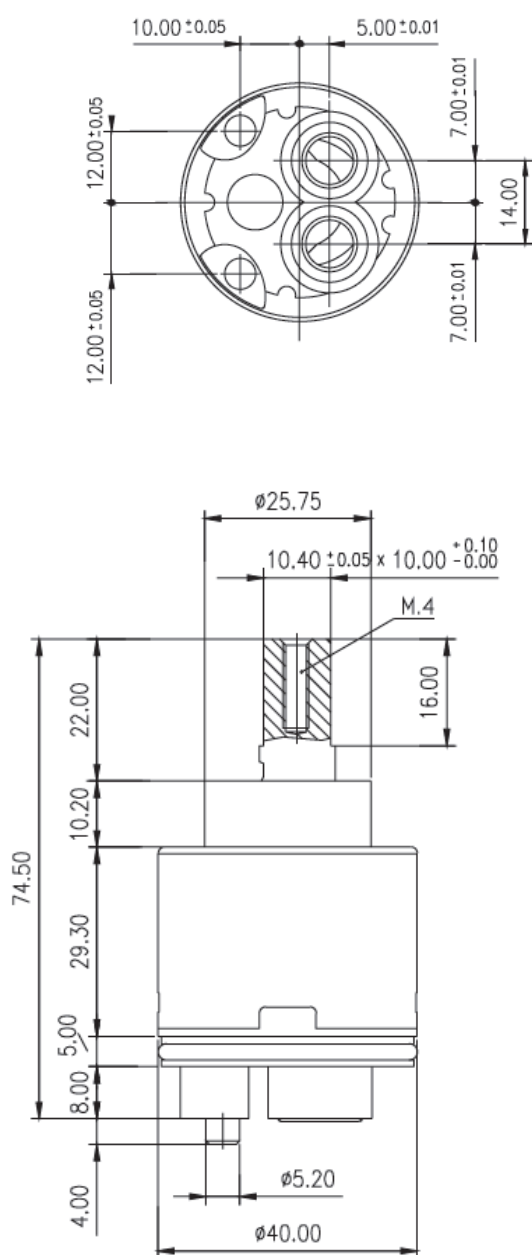

Machining prescription

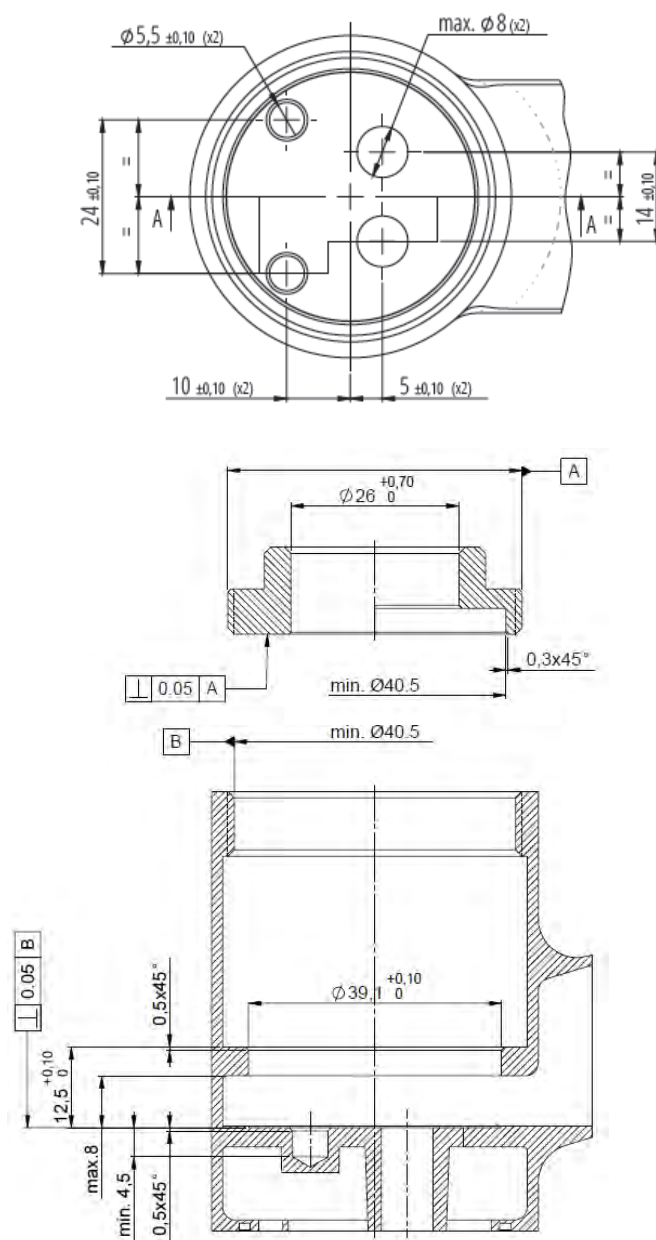

(2) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)